

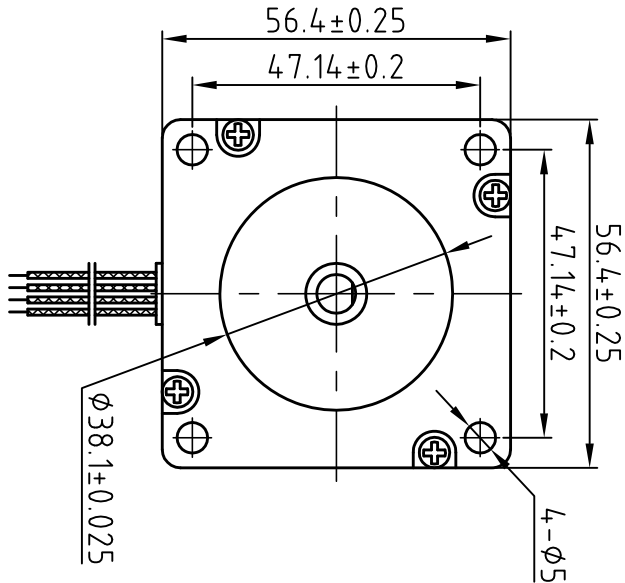


Dimension: (Unit: mm)

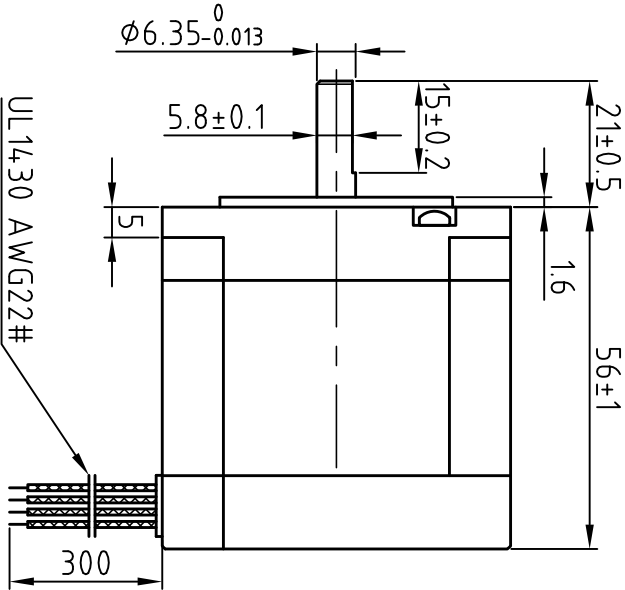

Motor Conections:

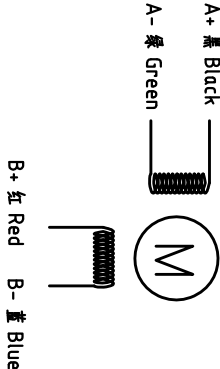

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	4A
Voltage	24 V
DC Resistance/phase ±10%	0.6 Ω
Inductance/phase ±20%	14 mH
Holding torque	1.2 N·M
Detent torque	0.026 N·M
Inertia	0.28 kg·cm ²
Weight	0.70 kg

设计	王洪松	日期	17.04.10	材料					深圳市雷豪智能控制股份有限公司
审核	刘佩峰			Material					SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
批准	田天胜	17.04.10		First Angle projection	第一角画法	比例 Scale	图例	名称 Title	混合式步进电机
批准	田天胜	17.04.10		重量 Weight		图号	57CM12X		
图号	Part No.			共 1 张	第 1 张	Sheet 1 of 1	图号	Part No.	