
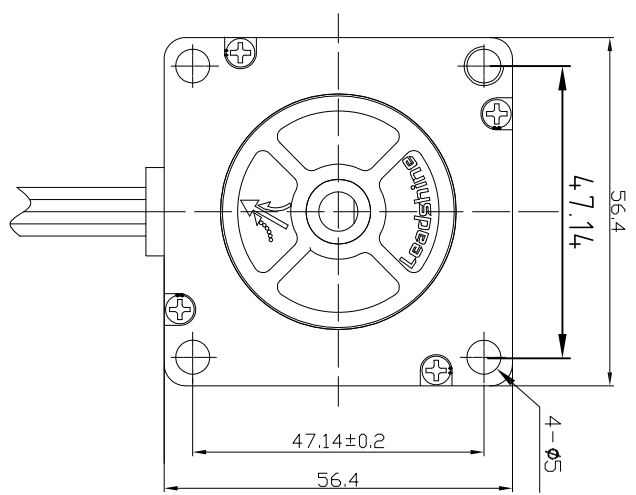


Dimension: (Unit: mm)

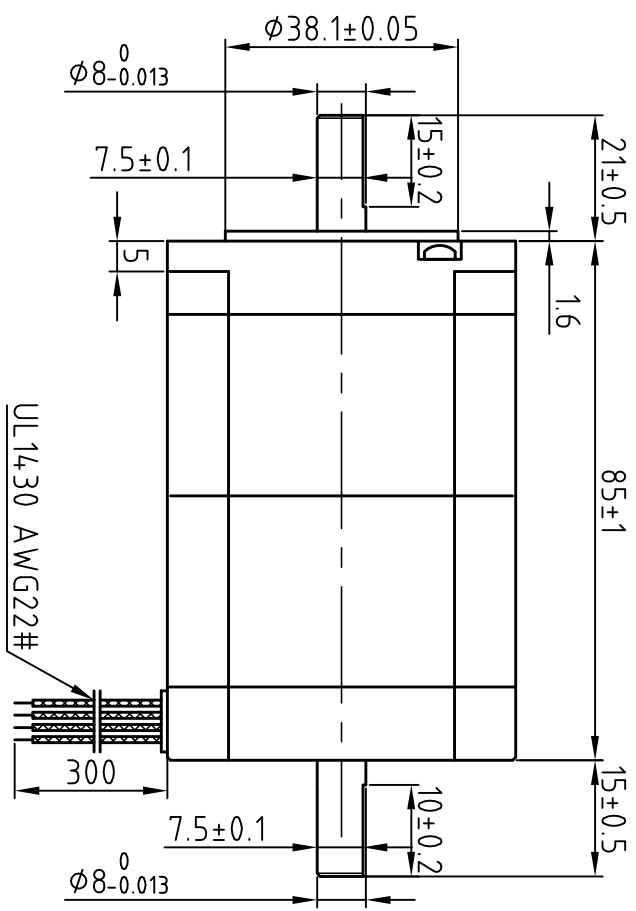


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	3.2 V
DC Resistance/phase ±10%	0.44Ω
Inductance/phase ±20%	2.0 mH
Holding torque	2.6 N·M
Detent torque	0.068 N·M
Inertia	0.480 kg·cm ²
Weight	1.4 kg

Motor Connctions:



设计 Designed	王洪林	日期 Date	2017.04.24	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰		2017.04.24	第一角画法 First Angle projection	混合式步进电机
批准 Approved	田天胜		2017.04.24	重量/Weight 比例/Scale	57CM26-SZ
图号 Part No.		共 1 页 第 1 页	Sheet 1 of 1	图号 DWG. NO.	