



版本 Rev.	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 By
V1.0	17.10.30		防水型步进电机	王洪林

**Dimension: (Unit: mm)**

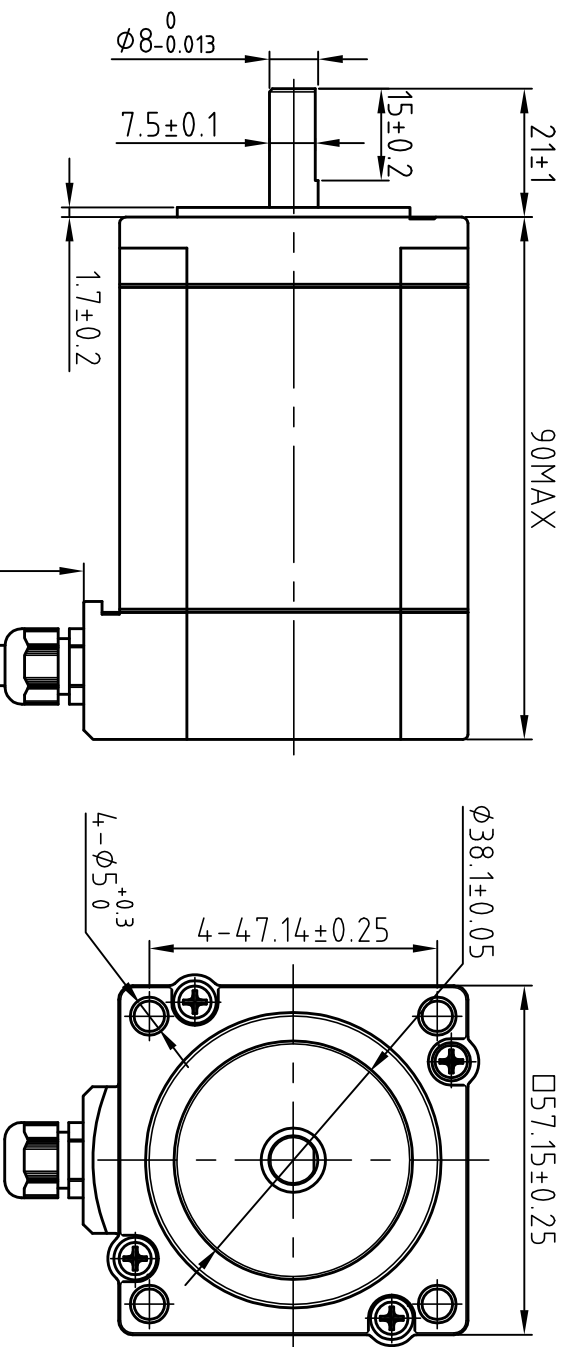

### Motor Connections:

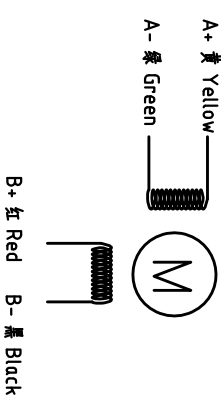



## Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Protection level	IP65
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

### Specification:

Current/phase	3.0 A
Voltage	4 V
DC Resistance/phase $\pm 10\%$	1.3 $\Omega$
Inductance/phase $\pm 20\%$	4.4 mH
Holding torque	2.1 N•M
Inertia	0.48 kg•cm <sup>2</sup>
Weight	1.0 kg

设计		王洪松	日期	2017.10.30	材料 Material	深圳市雷寨智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.				
Designed			Date							
审核	刘佩峰	2017.10.30	第一角画法 First Angle projection			名称 Title				
Checked			比例 Scale							
批准	田天胜	2017.10.30	重量 Weight	比例 Scale	图样标记 Stage Mark	混合式步进电机 57CM23-FS				
Approved										
料号 Part No.	共 1 套 第 1 套				Sheet 1 of 1	图号 DWG. NO.				